







TROUBLESHOOTING

Spray Pattern	Problems	Remedies
 Fluttering	<ol style="list-style-type: none"> Air enters between fluid nozzle and tapered seat of gun body. Air is suctioned from fluid needle packing. 	<ol style="list-style-type: none"> Remove fluid nozzle to clean seat. If it is damaged, replace nozzle Tighten fluid needle packing.
 Crescent	<ol style="list-style-type: none"> Paint buildup on air cap, partially clogs horn holes. Air pressure from both horns differs. 	<ol style="list-style-type: none"> Remove obstructions from horn holes. But do not use metal objects to clean horn holes.
 Inclined	<ol style="list-style-type: none"> Paint buildup on the periphery of the fluid nozzle hole or air cap center hole or damage. Loose fluid nozzle. 	<ol style="list-style-type: none"> Remove obstructions. Replace if damaged. Remove fluid nozzle, clean seated section
 Split	<ol style="list-style-type: none"> Paint viscosity too low. Fluid output too high. 	<ol style="list-style-type: none"> Add paint to increase viscosity. Adjust fluid adj. knob or pattern adj. knob.
 Heavy Center	<ol style="list-style-type: none"> Paint viscosity too high. Fluid output too low. 	<ol style="list-style-type: none"> Reduce viscosity. Increase fluid output.
 Spit	<ol style="list-style-type: none"> Fluid nozzle and fluid needle set are not seating properly. The first-stage travel of trigger (when only air discharges) decreases. Paint buildup inside air cap set 	<ol style="list-style-type: none"> Clean or replace fluid nozzle and fluid needle set. Replace fluid nozzle and fluid needle set. Clean air cap set.

PROBLEMS AND REMEDIES

Problem	Where it occurred	Parts to be checked	Cause	Remedy				
				Retighten	Adjust	Clean Replace		
Air leaks (from tip of air cap)	Air valve set	Air valve	*Dirt or damage on seat			x	x	
		Air valve seat set	*Dirt or damage on seat			x	x	
			*Wear on air valve spring					x
		O ring	*Damaged or deteriorated					x
Paint leaks	Fluid nozzle	Fluid nozzle - fluid needle set	*Dirt, damage, wear on seat			x	x	
			*Loose fluid needle adj. knob		x			
			*Wear on needle spring				x	
	Fluid nozzle - gun body	*Insufficient tightening	x					
		*Dirt or damage on seat			x	x		
		Fluid needle - packing set	*Needle does not return due to packing set too tight		x		x	
		*Needle does not return due to paint buildup on fluid needle		x	x			
Fluid needle	Needle packing set	*Wear	x			x		
	Packing seat	*Insufficient tightening	x					
Paint does not flow	Tip of gun	Fluid adj. knob	*Insufficient opening		x			
		Tip hole of nozzle	*Clogged			x		
		Paint filter	*Clogged			x	x	



AIR GUNSA s.r.l.
 46, Corso Vigevano
 10155 Torino - Italy
 Tel. +39 011 24 80 868
 Fax +39 011 85 19 44

Distributed by:



ANEST IWATA Europe s.r.l.
 46, Corso Vigevano
 10155 Torino - Italy
 Tel. +39 011 24 80 868
 Fax +39 011 85 19 44
 www.anest-iwataeu.com
 e-mail: info@anest-iwataeu.com

COMPANY WITH QUALITY SYSTEM CERTIFIED BY DNV
ISO 9002

ANEST IWATA Europe s.r.l.
 46, Corso Vigevano
 10155 Torino - Italy
 Tel. +39 011 24 80 868
 Fax +39 011 85 19 44
 www.anest-iwataeu.com
 e-mail: info@anest-iwataeu.com

Instruction Manual



AZ40 HTE / AV SPRAY GUN

CE **GB** Before use, adjustment or maintenance, it is important to read this instruction manual very carefully. This manual must be stored in a safe place for any future reference that may be necessary.

IMPORTANT


This spray gun should be operated only by an adequately trained operator, for safe use and maintenance of the equipment. Any misuse or handling other than those indicated in this Instruction Manual is not covered by guarantee. AIR GUNSA disclaims all responsibility for any accident or damage caused by failure to observe the operational and safety procedures as from this manual. In the interest of user friendliness, this manual contains information in a brief and concise form. For any additional information you may require regarding spray guns operations, or if any missing parts or any damage during transportation is found, please contact your nearest ANEST IWATA Company (see last cover page).

MAIN SPECIFICATIONS

Max. Working Pressure:	7.0 bar	Noise Level (LAeqT)	74.5 dB (A)
Air inlet pressure:	2.5 bar	Temperature range:	5-40C°

Modell	Type of feed	Nozzle Orifice ø mm	Air Cap Code	Fluid Output ml/min	Pattern Width mm	Air Consumption Nl/min	Total Weight + container g
AZ40 HTE AZ40 HTE AV	Gravity	0.8	W2CAP40AG08	60	100	130	510 AZ40 HTE (200 cc)
		1.0	W2CAP40AG10	90	110	130	
		1.2	W2CAP40AG12	120	130	130	560 AZ40 HTE (600 cc)
		1.5	W2CAP40AG15	170	140	170	
		1.8	W2CAP40AG18	210	150	200	520 AZ40 HTE AV (200 cc)
		2.0	W2CAP40AG20	230	160	200	

NOTE: for spare parts list see on page 3

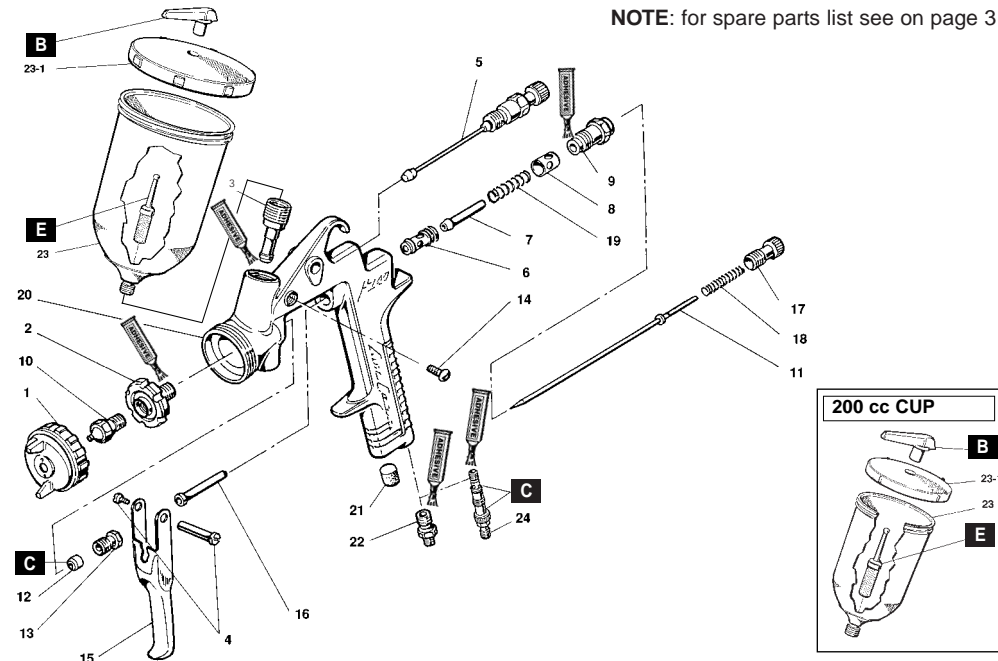

Manufactured by: AIR GUNSA s.r.l. - Via degli Aceri, 1 - 20010 Cardano al Campo (VA) Italy

MA0014EREV.1

SAFETY WARNINGS



FIRE OR EXPLOSION HAZARD

- Fluid and solvents can be highly flammable or combustible.
 - Use in well-ventilated spray booth.
 - Avoid any ignition sources such as smoking, open flames, electrical hazard, etc.



- NEVER use HALOGENATED HYDROCARBON SOLVENTS (1.1.1 TRICHLORINE, ETHYL CHLORIDE, etc.), which can chemically react with aluminium and zinc parts and cause an explosion. Be sure that all fluids and solvents used are chemically compatible with aluminium and zinc parts. If in doubt, consult your fluid or solvent supplier to ensure compatibility. Details of materials used in the gun are available on request.

- To reduce the risk of static sparking, grounding continuity to the spray equipment and object being sprayed must be maintained.



MISUSE HAZARD

- NEVER point gun in the direction of human body.
- NEVER exceed the maximum safe working pressure of the equipment.
- ALWAYS release air and fluid pressures before cleaning, disassembling or servicing. For emergency stop and prevention of unintended operation, a ball valve installation near the gun to stop air supply is recommended.



HAZARD CREATED WHILE COATING MATERIALS ARE ATOMIZED AND SPRAYED

- Toxic vapours produced by spraying certain materials can create intoxication and serious damage to health.
 - Use the gun in well-ventilated areas.
 - Always wear protective eyewear, gloves, respirator, etc., to prevent the toxic vapour hazard, solvents and paint from coming into contact with your eyes or skin.
- Noise level mentioned in main specifications was measured at 1.0 m behind the tip of the gun, 1.6 m height from floor.
 - Wear earplugs if required.



OTHER HAZARDS

- NEVER enter working areas of robots, reciprocators, conveyors, etc., unless machines are switched off.
- NEVER spray foods or chemicals through the spray gun.
- NEVER modify this product for any applications.

INSTALLATION

IMPORTANT:

- This gun should be operated by adequately trained operators only.
- Ensure that the gun has not been damaged during transportation.
- Clean dry air should be supplied to the gun.

- Connect the air hose to air nipple (Ref. 22 for AZ40 HTE end Ref. 24 for AZ40 HTE AV) tightly.
- Tighten the gravity cup on the threaded bushing Ref. 3 tightly.
- Flush the gun fluid passage with a compatible solvent.
- Pour paint into container, test spray, and adjust fluid output as well as pattern width.

Air-Gunsa


HOW TO OPERATE

Set the spray distance from the gun to the workpiece as near as possible within the range of 150 mm.

Suggest air pressure is 2.5 bar in order to obtain the best transfer efficiency.

Keep fluid output as small as possible to the extent that the job will not be hindered. It will lead to better finishing with fine atomization. The gun should be held so that gun is perpendicular to the surface of the workpiece at all times. And, the gun should move in a straight and horizontal line. Arcing the gun causes uneven painting.

Recommended paint viscosity is 21 sec./ Ford #4 and differs according to paint property and painting conditions.

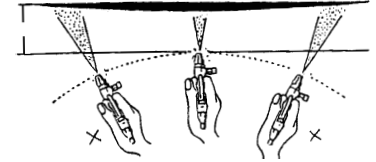

MAINTENANCE AFTER PAINTING



WARNING

TURN OFF AIR AND COATING MATERIALS TO THE GUN AND RELEASE PRESSURE BY TRIGGERING THE GUN BEFORE DISASSEMBLING, CLEANING OR SERVICING. PAY ATTENTION WHEN DISASSEMBLING SPRAY GUN SINCE YOU MUST TOUCH SHARP PARTS. BEFORE DISASSEMBLING READ CAREFULLY THIS INSTRUCTION MANUAL.

- Pour remaining paint into another container and then clean paint passages and air cap. Spray a small amount of thinner to clean paint passages. Incomplete cleaning will cause adverse pattern shape and particles. Clean fully and promptly two-component paint after use.
- Clean other sections with attached brush soaked with thinner and waste cloth.
- Clean paint passages fully before disassembly.
- Remove fluid nozzle after removing fluid needle set or while keeping fluid needle pulled, in order to protect seat section.
- While keeping fluid needle set inserted, tighten fluid needle packing set by hand. Then tighten gradually by spanner. Adjust packing set while pulling trigger and watching movement of fluid needle set since too much tightening will slow down movement of fluid needle and result in leakage from tip of nozzle.
- Turn pattern adj. knob counterclockwise to full opening, and then tighten pattern adj. guide into gun body

WARNING



NEVER USE COMMERCIAL OR OTHER PARTS INSTEAD OF AIR GUNSA ORIGINAL SPARE PARTS
NEVER IMMERSE THE WHOLE GUN INTO LIQUID SUCH AS THINNER
NEVER DAMAGE HOLES OF AIR CAP, FLUID NOZZLE OR FLUID NEEDLE

SPARE PARTS LIST

DESCRIPTION	Ref.part	DESCRIPTION	Ref.part
AIR CAP	Ref.part 1	TRIGGER	Ref.part 15
NOZZLE HOLDER	Ref.part 2	AIR VALVE SHAFT	Ref.part 16
THREADED BUSHING	Ref.part 3	FLUID NEEDLE ADJ. KNOB	Ref.part 17
TRIGGER STUD	Ref.part 4	NEEDLE SPRING	Ref.part 18
PATTERN ADJUSTMENT	Ref.part 5	AIR VALVE SPRING	Ref.part 19
AIR VALVE SEAT SET	Ref.part 6	GUN BODY	Ref.part 20
AIR VALVE	Ref.part 7	PLUG	Ref.part 21
BUSHING	Ref.part 8	AIR NIPPLE G 1/4" M AZ40 HTE	Ref.part 22
FLUID NEEDLE GUIDE SET	Ref.part 9	COMPLETE CUP (200 cc/600 cc)	Ref.part 23
FLUID NOZZLE	Ref.part 10	LID SET + NON DRIP	Ref.part 23 +B
FLUID NEEDLE	Ref.part 11	AIR FLOW CONTROL VALVE AZ40 HTE AV	Ref.part 24
NEEDLE PACKING	Ref.part 12	PACKING SET	Ref.part C
NEEDLE PACKING NUT	Ref.part 13	PAINT FILTER CUP SET	Ref.part E
SCREW	Ref.part 14		

Air-Gunsa